

✓ SMD2119 280LEDS/M(CCT)



Basic Parameters	
Size	5000×10×1mm
Cutting Unit	14LEDs/50mm
Input Voltage	24VDC
Input Current	0.4A/m
Typ.power	9.6W/m
Max.Power	10.56W
Bend Diameter	>60mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


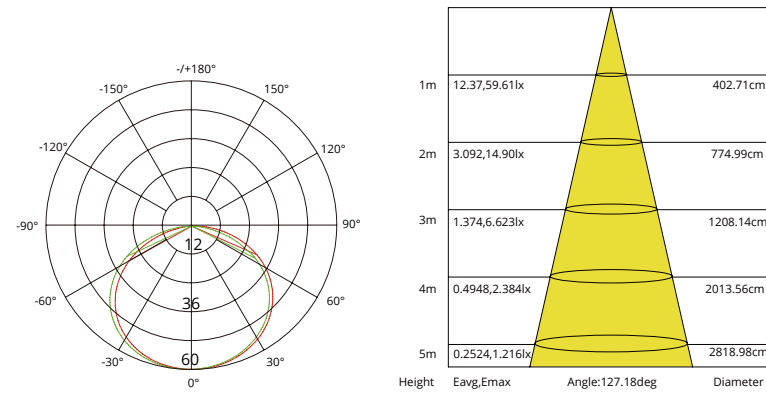


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	3000K	510	106	■
	6500K	540	112	■
	3000K+6500K	1045	110	■

✓ DIMENSIONAL DRAWING



✓ SMD2119 70LEDS/M

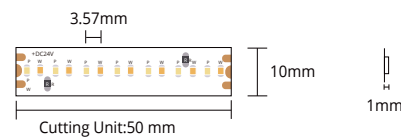

Basic Parameters	
Size	5000×8×1mm
Cutting Unit	7LEDs/100mm
Input Voltage	24VDC
Input Current	0.2A/m
Typ.power	4.8W/m
Max.Power	5.3W
Bend Diameter	>60mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


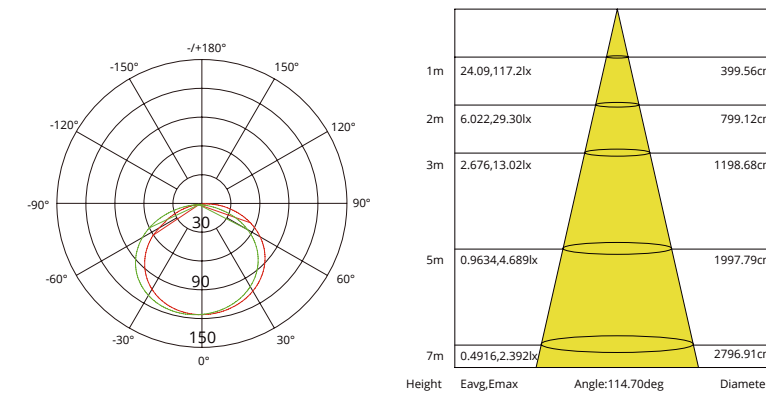


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	Energy Efficiency Class
>80	2700K	480	100	F ■
	3000K	504	105	F ■
	4000K	530	110	F ■
	5000K	530	110	F ■
	6500K	525	110	F ■

✓ DIMENSIONAL DRAWING



SMD2119 140LEDS/M

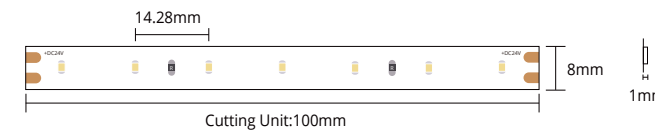

Basic Parameters	
Size	5000×8×1mm
Cutting Unit	7LEDs/50mm
Input Voltage	24VDC
Input Current	0.4A/m
Typ.power	9,6W/m
Max.Power	10.56W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


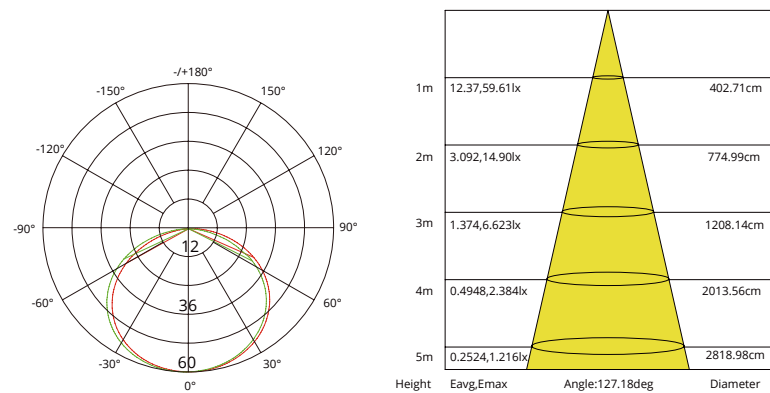


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	2700K	890	93	F	■
	3000K	940	98	F	■
	4000K	990	103	F	■
	5000K	990	103	F	■
	6500K	960	100	F	■

DIMENSIONAL DRAWING



SMD2119 140LEDS/M

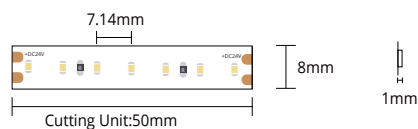

Basic Parameters	
Size	5000×4×1mm
Cutting Unit	7LEDs/50mm
Input Voltage	24VDC
Input Current	0.2A/m
Typ.power	4.8W/m
Max.Power	5.28W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


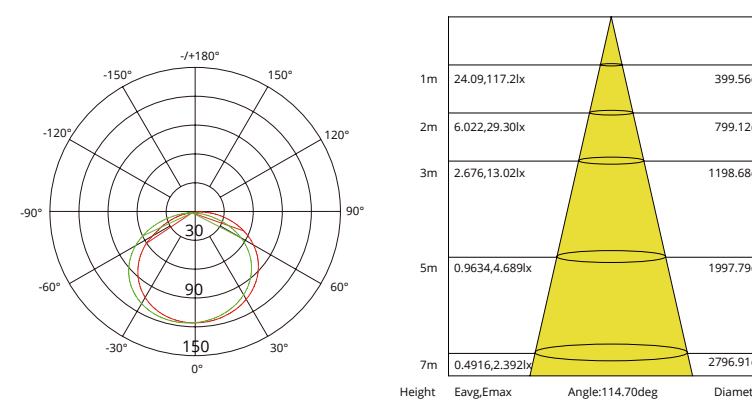


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	2700K	490	102	F	■
	3000K	515	108	F	■
	4000K	540	113	F	■
	5000K	540	113	F	■
	6500K	530	110	F	■

DIMENSIONAL DRAWING



SMD2119 280LEDS/M



Basic Parameters	
Size	5000×10×1mm
Cutting Unit	7LEDs/25mm
Input Voltage	24VDC
Input Current	0.8A/m
Typ.power	19.2W/m
Max.Power	21.12W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


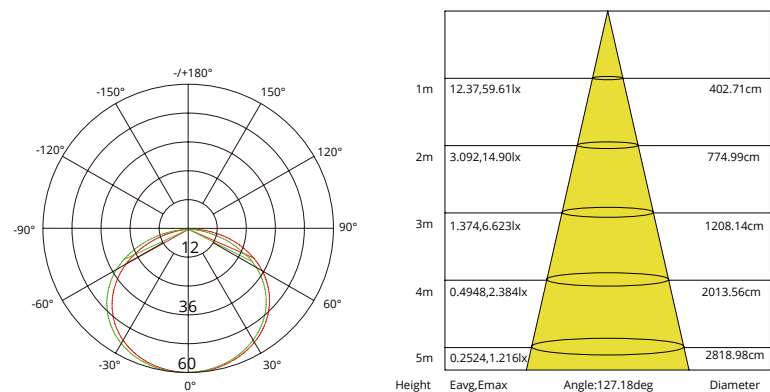


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	2700K	1693	118	F	
	3000K	1797	125	E	
	4000K	1889	131	E	
	5000K	1889	131	E	
	6500K	1797	125	E	

DIMENSIONAL DRAWING



SMD2119 350LEDS/M



Basic Parameters	
Size	5000×10×1mm
Cutting Unit	7LEDs/20mm
Input Voltage	24VDC
Input Current	0.5A/m
Typ.power	12W/m
Max.Power	13.2W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP

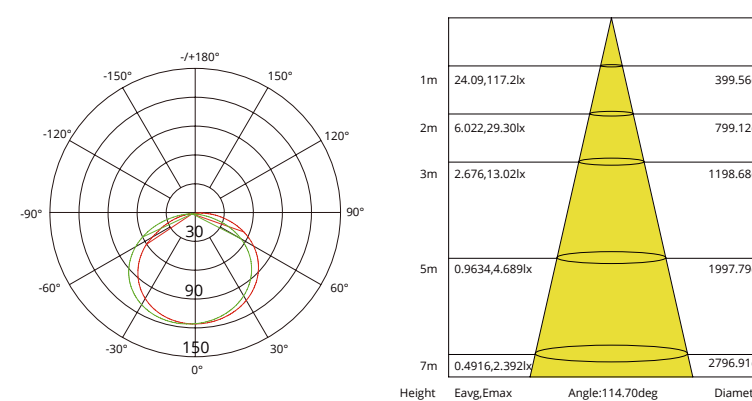


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	2700K	1240	104	F	
	3000K	1310	110	F	
	4000K	1378	115	F	
	5000K	1378	115	F	
	6500K	1350	113	F	

DIMENSIONAL DRAWING

