


SMD5060 60LEDs/M




| Basic Parameters | |
|------------------|---------------|
| Size | 5000×10×1.2mm |
| Cutting Unit | 6LEDs/100mm |
| Input Voltage | 24VDC |
| Input Current | 0.6A/m |
| Typ-power | 14.4W/m |
| Max.Power | 15.84W |
| Bend Diameter | 60mm |
| Copper foil | 2oz |

PHOTOMETRIC OF 1M STRIP

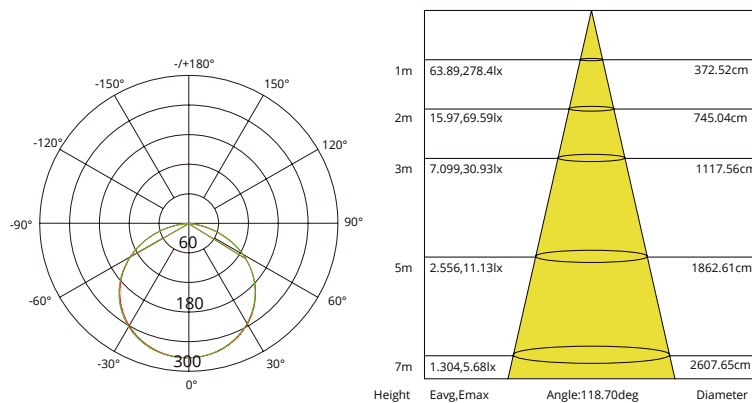

| Photo-electric Parameters | | | | | |
|---------------------------|-------|------|------|-------------------------|---|
| CRI | CCT | LM/m | LM/W | Energy Efficiency Class | |
| >80 | 2700K | 1037 | 72 | G | ■ |
| | 3000K | 1097 | 76 | G | ■ |
| | 4000K | 1152 | 80 | G | ■ |
| | 5000K | 1152 | 80 | G | ■ |
| >90 | 2700K | 830 | 58 | G | ■ |
| | 3000K | 878 | 61 | G | ■ |
| | 4000K | 922 | 64 | G | ■ |
| | 5000K | 922 | 64 | G | ■ |
| | 6500K | 878 | 61 | G | ■ |

DIMENSIONAL DRAWING

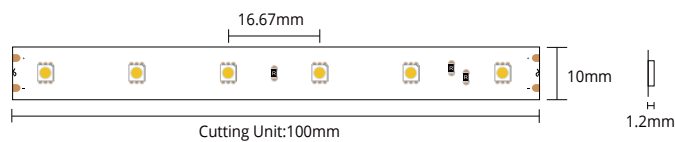


SMD3528 60LEDs/M




| Basic Parameters | |
|------------------|--------------|
| Size | 5000×8×1.2mm |
| Cutting Unit | 3LEDs/50mm |
| Input Voltage | 12VDC |
| Input Current | 0.4A/m |
| Typ-power | 4.8W/m |
| Max.Power | 5.28W |
| Bend Diameter | 60mm |
| Copper foil | 2oz |

PHOTOMETRIC OF 1M STRIP

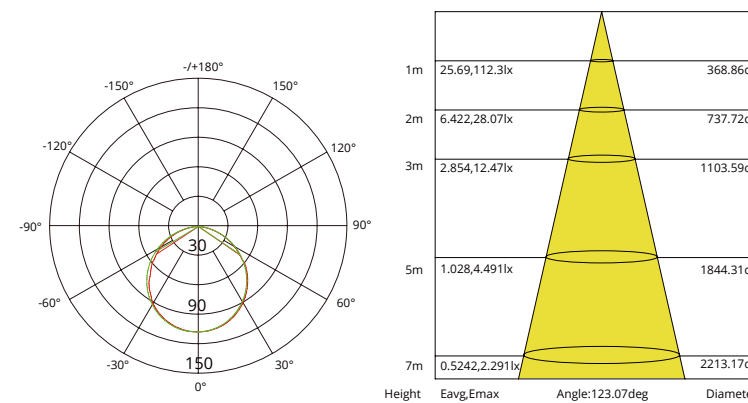

| Photo-electric Parameters | | | | | |
|---------------------------|-------|------|------|-------------------------|---|
| CRI | CCT | LM/m | LM/W | Energy Efficiency Class | |
| >80 | 2700K | 374 | 78 | G | ■ |
| | 3000K | 398 | 83 | G | ■ |
| | 4000K | 418 | 87 | G | ■ |
| | 5000K | 418 | 87 | G | ■ |
| >90 | 2700K | 299 | 62 | G | ■ |
| | 3000K | 318 | 66 | G | ■ |
| | 4000K | 334 | 70 | G | ■ |
| | 5000K | 334 | 70 | G | ■ |
| | 6500K | 318 | 66 | G | ■ |

DIMENSIONAL DRAWING

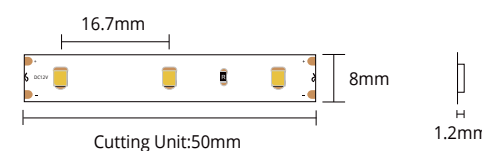


SMD3528 60LEDS/M




| Basic Parameters | |
|------------------|--------------|
| Size | 5000×8×1.2mm |
| Cutting Unit | 6LEDs/100mm |
| Input Voltage | 24VDC |
| Input Current | 0.2A/m |
| Typ-power | 4.8W/m |
| Max.Power | 5.28W |
| Bend Diameter | >60mm |
| Copper foil | 2oz |

PHOTOMETRIC OF 1M STRIP

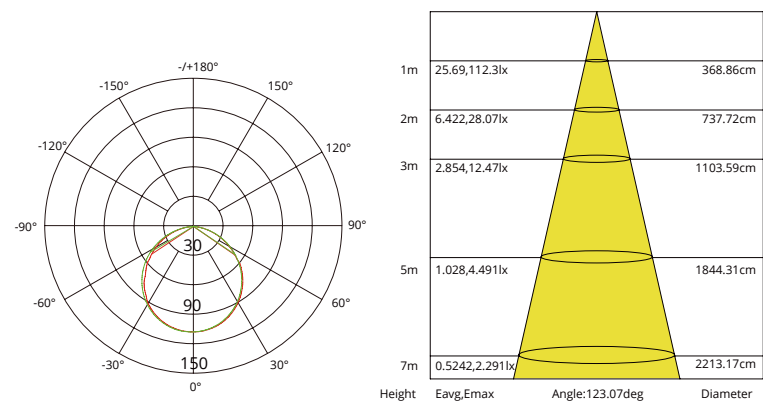

| Photo-electric Parameters | | | | | |
|---------------------------|-------|------|------|-------------------------|---|
| CRI | CCT | LM/m | LM/W | Energy Efficiency Class | |
| >80 | 2700K | 374 | 78 | G | ■ |
| | 3000K | 398 | 83 | G | ■ |
| | 4000K | 418 | 87 | G | ■ |
| | 5000K | 418 | 87 | G | ■ |
| >90 | 6500K | 398 | 83 | G | ■ |
| | 2700K | 299 | 62 | G | ■ |
| | 3000K | 318 | 66 | G | ■ |
| | 4000K | 334 | 70 | G | ■ |
| | 5000K | 334 | 70 | G | ■ |
| 6500K | 318 | 66 | G | ■ | |

DIMENSIONAL DRAWING

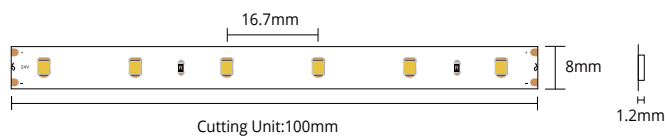


SMD3528 120LEDS/M




| Basic Parameters | |
|------------------|--------------|
| Size | 5000×8×1.2mm |
| Cutting Unit | 3LEDs/25mm |
| Input Voltage | 12VDC |
| Input Current | 0.8A/m |
| Typ-power | 9.6W/m |
| Max.Power | 10.56W |
| Bend Diameter | >60mm |
| Copper foil | 2oz |

PHOTOMETRIC OF 1M STRIP

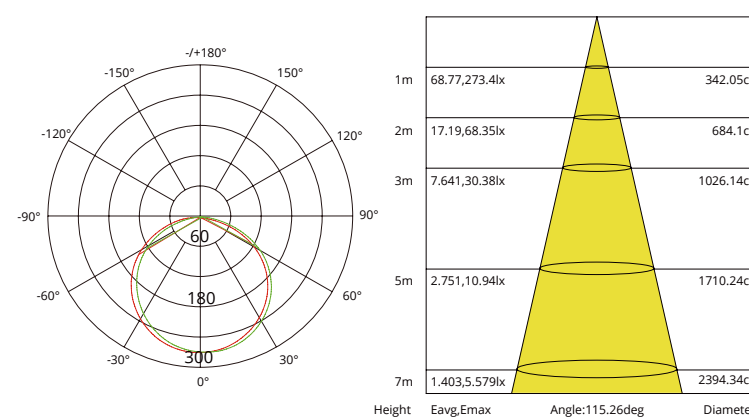

| Photo-electric Parameters | | | | | |
|---------------------------|-------|------|------|-------------------------|---|
| CRI | CCT | LM/m | LM/W | Energy Efficiency Class | |
| >80 | 2700K | 701 | 73 | G | ■ |
| | 3000K | 749 | 78 | G | ■ |
| | 4000K | 787 | 82 | G | ■ |
| | 5000K | 787 | 82 | G | ■ |
| >90 | 6500K | 749 | 78 | G | ■ |
| | 2700K | 560 | 58 | G | ■ |
| | 3000K | 600 | 62 | G | ■ |
| | 4000K | 630 | 65 | G | ■ |
| | 5000K | 630 | 65 | G | ■ |
| 6500K | 600 | 62 | G | ■ | |

DIMENSIONAL DRAWING




SMD3528 120LEDS/M




| Basic Parameters | |
|------------------|--------------|
| Size | 5000×8×1.2mm |
| Cutting Unit | 6LEDs/50mm |
| Input Voltage | 24VDC |
| Input Current | 0.4A/m |
| Typ-power | 9,6W/m |
| Max.Power | 10.56W |
| Bend Diameter | >60mm |
| Copper foil | 2oz |

PHOTOMETRIC OF 1M STRIP

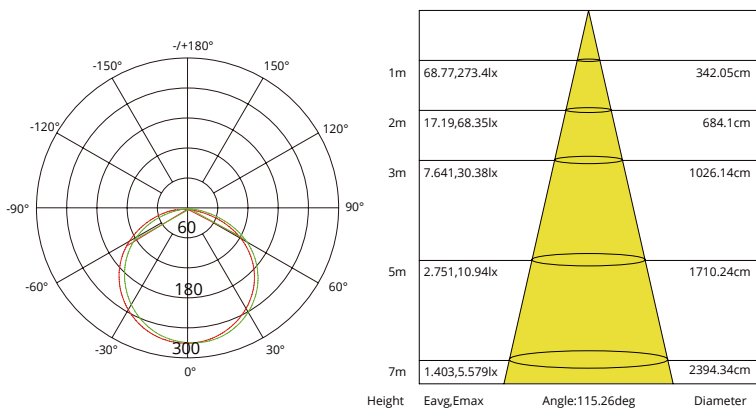

| Photo-electric Parameters | | | | | |
|---------------------------|-------|------|------|-------------------------|---|
| CRI | CCT | LM/m | LM/W | Energy Efficiency Class | |
| >80 | 2700K | 701 | 73 | G | ■ |
| | 3000K | 749 | 78 | G | ■ |
| | 4000K | 787 | 82 | G | ■ |
| | 5000K | 787 | 82 | G | ■ |
| >90 | 6500K | 749 | 78 | G | ■ |
| | 2700K | 560 | 58 | G | ■ |
| | 3000K | 600 | 62 | G | ■ |
| | 4000K | 630 | 65 | G | ■ |
| | 5000K | 630 | 65 | G | ■ |
| 6500K | 600 | 62 | G | ■ | |

DIMENSIONAL DRAWING

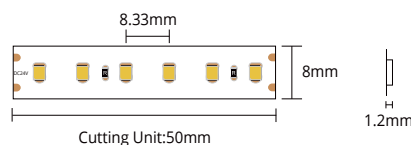


SMD5060 60LEDS/M



| Basic Parameters | |
|------------------|---------------|
| Size | 5000×10×1.2mm |
| Cutting Unit | 3LEDs/50mm |
| Input Voltage | 12VDC |
| Input Current | 1.2A/m |
| Typ-power | 14.4W/m |
| Max.Power | 15.84W |
| Bend Diameter | >60mm |
| Copper foil | 2oz |

PHOTOMETRIC OF 1M STRIP

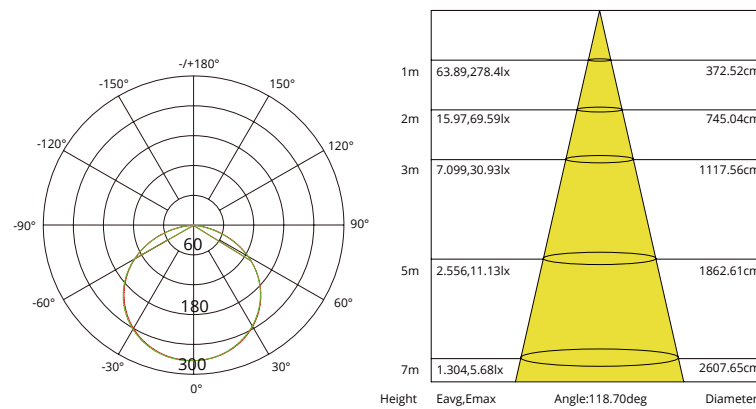

| Photo-electric Parameters | | | | | |
|---------------------------|-------|------|------|-------------------------|---|
| CRI | CCT | LM/m | LM/W | Energy Efficiency Class | |
| >80 | 2700K | 1037 | 72 | G | ■ |
| | 3000K | 1097 | 76 | G | ■ |
| | 4000K | 1152 | 80 | G | ■ |
| | 5000K | 1152 | 80 | G | ■ |
| >90 | 6500K | 1097 | 76 | G | ■ |
| | 2700K | 830 | 58 | G | ■ |
| | 3000K | 878 | 61 | G | ■ |
| | 4000K | 922 | 64 | G | ■ |
| | 5000K | 922 | 64 | G | ■ |
| 6500K | 878 | 61 | G | ■ | |

DIMENSIONAL DRAWING

