



✓ SMD2835 120 LEDS/M



Basic Parameters	
Size	5000×8×1.1mm
Cutting Unit	4LEDs/33mm
Input Voltage	24VDC
Input Current	0.8A/m
Typ-power	20W/m
Max.Power	22W
Bend Diameter	>60mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


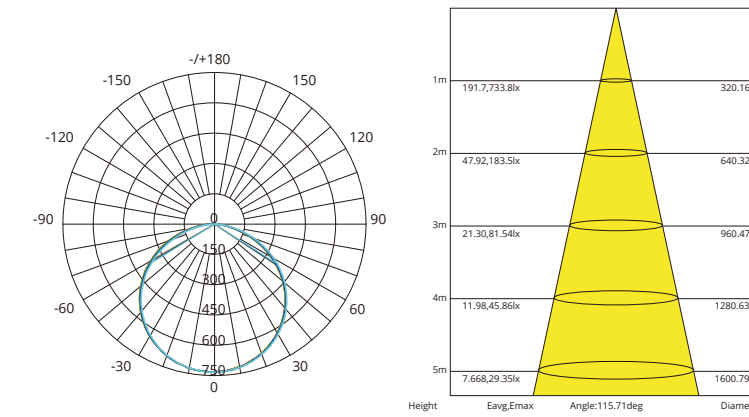


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	1181	114	<span style="display:inline-block; width:10px; height:10px; background-color:#d9534f;"></span>
	6500K	1256	122	<span style="display:inline-block; width:10px; height:10px; background-color:#5bc0de;"></span>
	2700K+6500K	2193	116	<span style="display:inline-block; width:10px; height:10px; background-color:#ffc107;"></span>

✓ DIMENSIONAL DRAWING



SMD2835 60+60LEDS/M



Basic Parameters	
Size	5000×10×1.2mm
Cutting Unit	12LEDs/100mm
Input Voltage	24VDC
Input Current	0.4A/m
Typ-power	9.6W/m
Max.Power	10.56W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


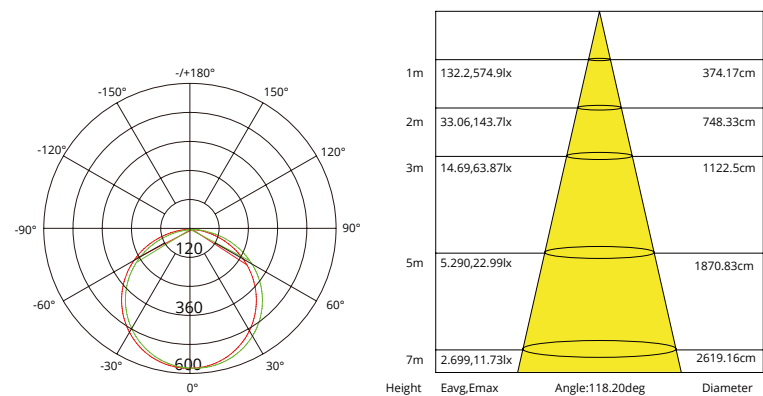


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	550	91.6	
	6500K	630	95	
	2700K+6500K	1170	78	

DIMENSIONAL DRAWING



SMD2835 96+96LEDS/M

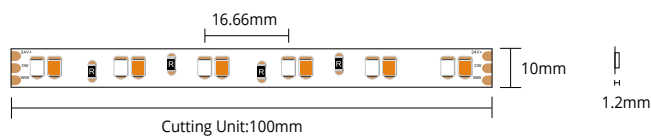

Basic Parameters	
Size	5000×10×1.2mm
Cutting Unit	12LEDs/62.5mm
Input Voltage	24VDC
Input Current	0.8A/m
Typ-power	19.2W/m
Max.Power	21.12W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


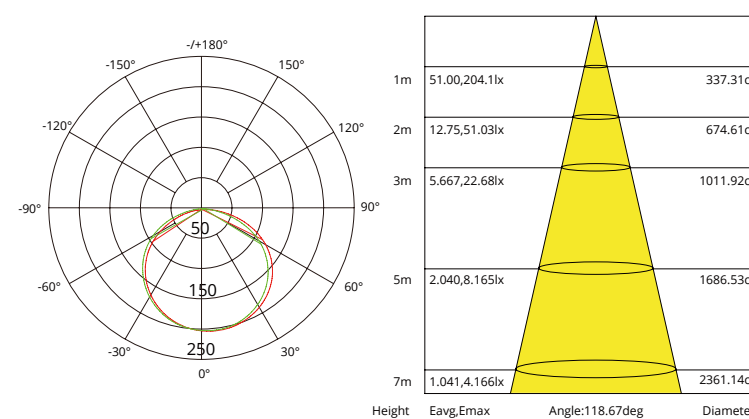


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	310	62	
	6500K	475	95	
	2700K+6500K	780	78	

DIMENSIONAL DRAWING



✓ SMD2835 60+60LEDS/M

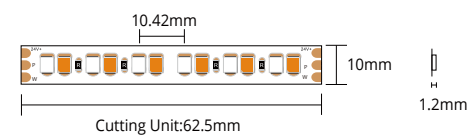

Basic Parameters	
Size	5000×12×1.2mm
Cutting Unit	12LEDs/100mm
Input Voltage	24VDC
Input Current	0.4A/m
Typ-power	9,6W/m
Max.Power	10.56W
Bend Diameter	60mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


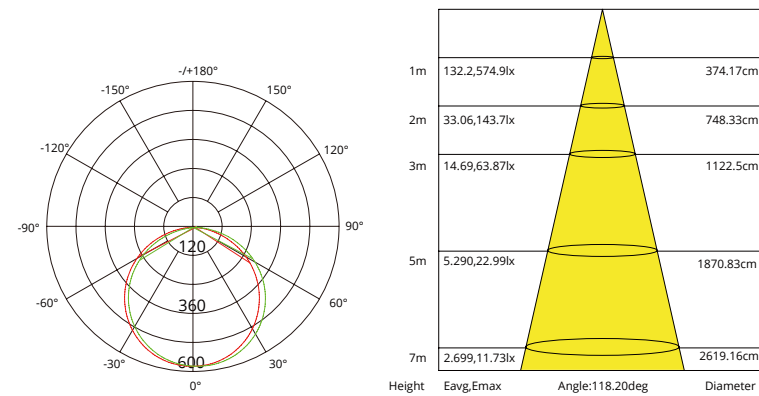


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	310	62	
	6500K	475	95	
	2700K+6500K	780	78	

✓ DIMENSIONAL DRAWING



✓ SMD2835 120+120LEDS/M

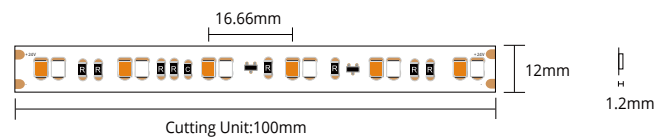

Basic Parameters	
Size	5000×12×1.2mm
Cutting Unit	12LEDs/50mm
Input Voltage	24VDC
Input Current	0.8A/m
Typ-power	19.2W/m
Max.Power	21.12W
Bend Diameter	>60mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


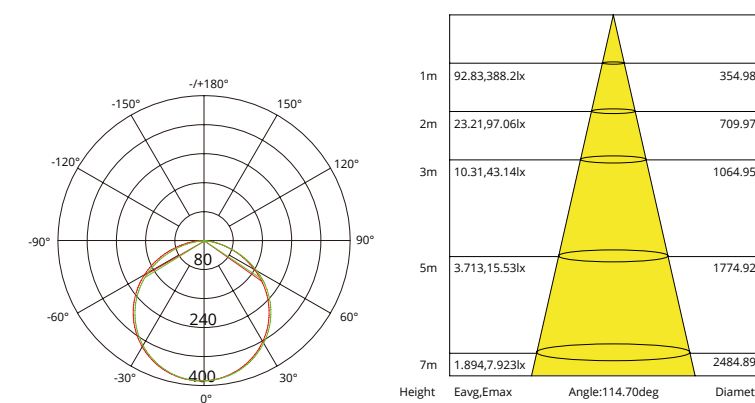


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	310	62	
	6500K	475	95	
	2700K+6500K	780	78	

✓ DIMENSIONAL DRAWING



✓ SMD2835 120+120LEDS/M

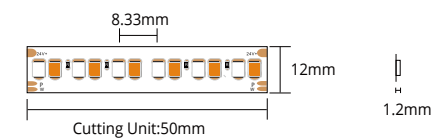

Basic Parameters	
Size	5000×12×1.2mm
Cutting Unit	12LEDs/50mm
Input Voltage	24VDC
Input Current	0.8A/m
Typ-power	19.2W/m
Max.Power	21.12W
Bend Diameter	60mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


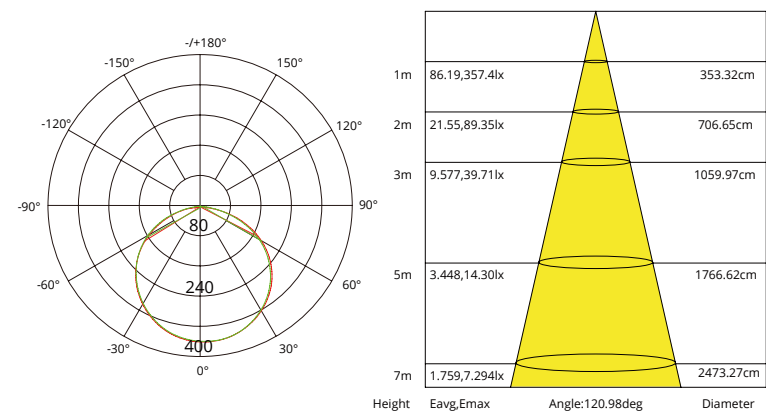


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	310	62	
	6500K	475	95	
	2700K+6500K	780	78	

✓ DIMENSIONAL DRAWING



✓ SMD2835 60 LEDS/M

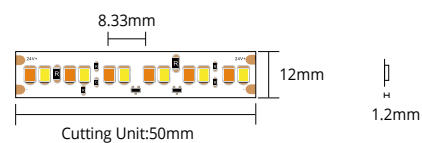

Basic Parameters	
Size	5000×8×1.1mm
Cutting Unit	4LEDs/66.66mm
Input Voltage	24VDC
Input Current	0.4A/m
Typ-power	10W/m
Max.Power	11W
Bend Diameter	>60mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


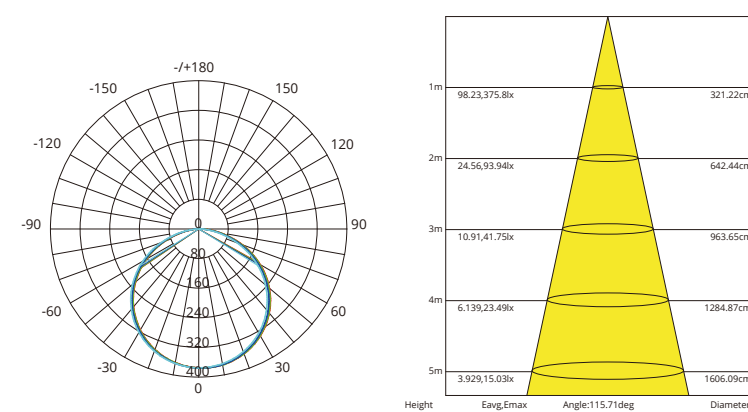


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	590	98	
	6500K	777	117	
	2700K+6500K	1124	112	

✓ DIMENSIONAL DRAWING



SMD2835 120LEDS/M

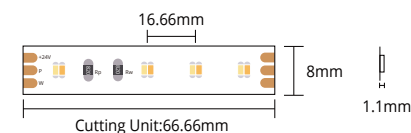

Basic Parameters	
Size	5000×10×1.2mm
Cutting Unit	4LEDs/33.33MM
Input Voltage	24VDC
Input Current	0.4A/m
Typ-power	9,6W/m
Max.Power	10.56W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


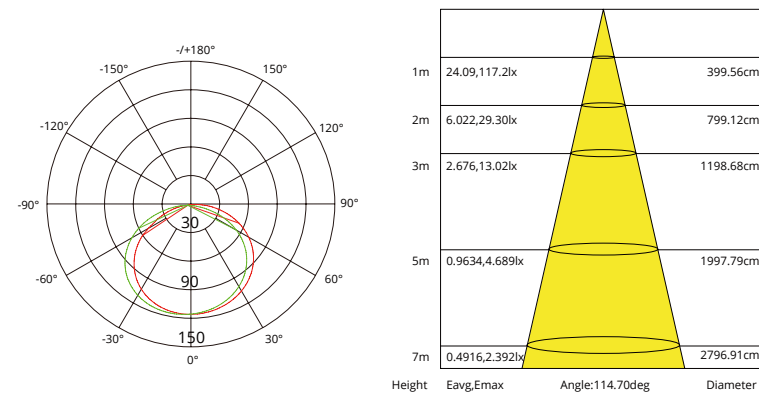


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	410	72	
	6500K	475	96	
	2700K+6500K	840	86	

DIMENSIONAL DRAWING



SMD2835 60 LEDS/M



Basic Parameters	
Size	5000×8×1.1mm
Cutting Unit	2LEDs/33mm
Input Voltage	12VDC
Input Current	0.8A/m
Typ-power	10W/m
Max.Power	11W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


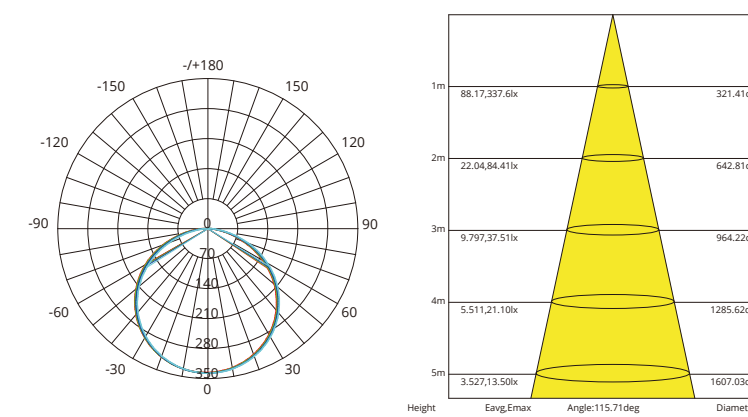


Photo-electric Parameters				
CRI	CCT	LM/m	LM/W	
>90	2700K	600	113	
	6500K	640	128	
	2700K+6500K	1012	117	

DIMENSIONAL DRAWING



SMD2835 120 LEDS/M



Basic Parameters

Size	5000×8×1.1mm
Cutting Unit	2LEDs/16.66mm
Input Voltage	12VDC
Input Current	0.8A/m
Typ-power	10W/m
Max.Power	11W
Bend Diameter	>60mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP

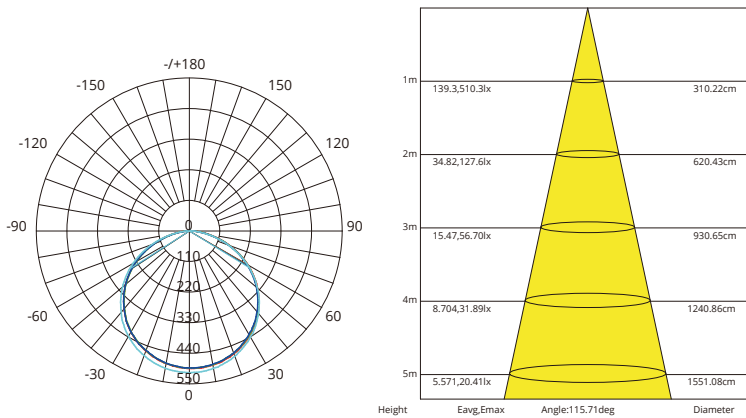


Photo-electric Parameters

CRI	CCT	LM/m	LM/W
>90	2700K	950	117
	6500K	1013	119
	2700K+6500K	1506	114

DIMENSIONAL DRAWING

