



✓ SMD2835 60LEDS/M



Basic Parameters

Size	13.5×6mm
Cutting Unit	60LEDs/1000mm
Input Voltage	AC 220V-240V
Input Current	1.82A/50m
Typ-power	8W/m
Max.Power	8.8W
Bend Diameter	>80mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


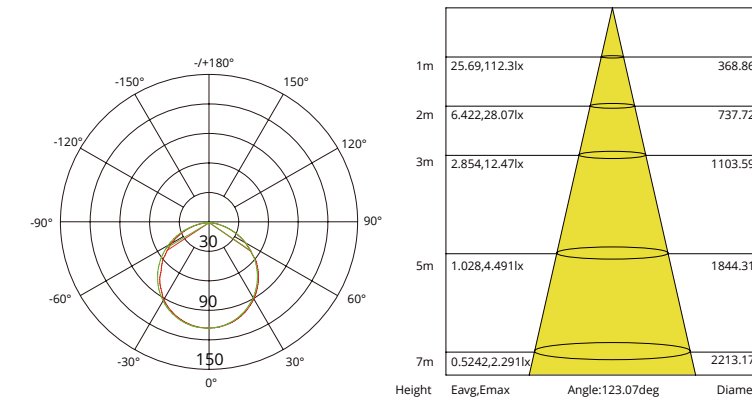


Photo-electric Parameters

CRI	CCT	LM/m	LM/W	Energy Efficiency Class
>80	4000K	720	90	F ■
	5000K	720	90	F ■
	6500K	688	86	F ■

✓ DIMENSIONAL DRAWING



✓ SMD2835 120LEDS/M



Basic Parameters	
Size	13.5×6mm
Cutting Unit	120LEDS/1000mm
Input Voltage	AC 220V-240V
Input Current	2.27A/50m
Typ-power	10W/m
Max.Power	11W
Bend Diameter	>80mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


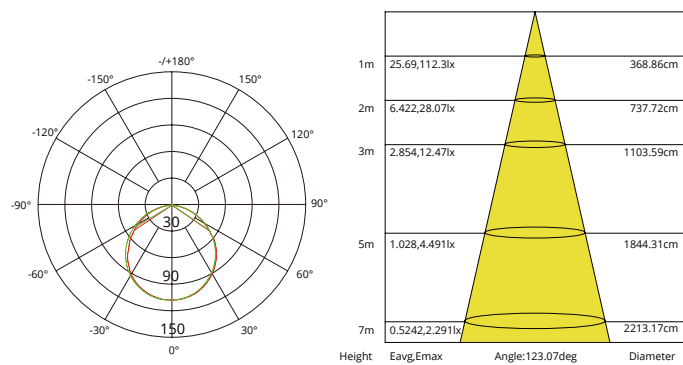


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	4000K	900	90	F	■
	5000K	900	90	F	■
	6500K	860	86	F	■

✓ DIMENSIONAL DRAWING



✓ SMD2835 180LEDS/M



Basic Parameters	
Size	16.5×6.8mm
Cutting Unit	180LEDS/1000mm
Input Voltage	AC 220V-240V
Input Current	2.73A/50m
Typ-power	12W/m
Max.Power	13.2W
Bend Diameter	>80mm
Copper foil	2oz

✓ PHOTOMETRIC OF 1M STRIP


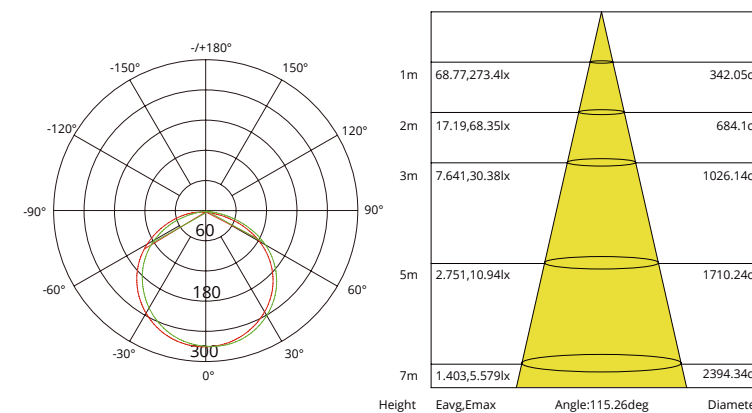


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	4000K	1080	90	F	■
	5000K	1080	90	F	■
	6500K	1032	86	F	■

✓ DIMENSIONAL DRAWING



SMD2835 56LEDS/M



Basic Parameters	
Size	16.5x6.8mm
Cutting Unit	28LEDs/500mm
Input Voltage	AC 220V-240V
Input Current	1.59A/50m
Typ-power	7W/m
Max.Power	7.7W
Bend Diameter	>80mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


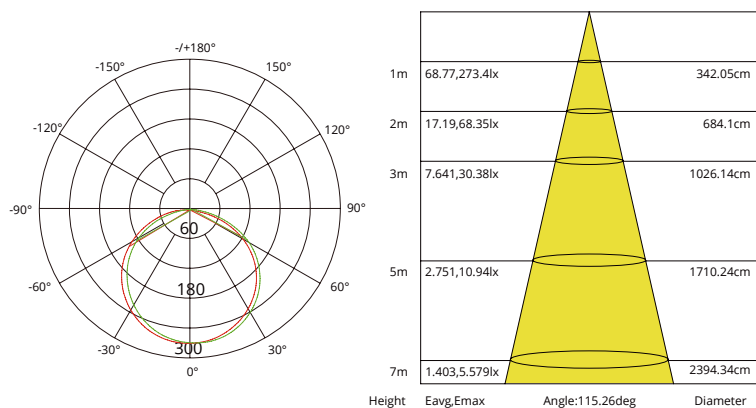


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	4000K	735	105	F	
	5000K	735	105	F	
	6500K	700	100	F	

DIMENSIONAL DRAWING



SMD2835 104LEDS/M



Basic Parameters	
Size	16.5x6.8mm
Cutting Unit	26LEDs/250mm
Input Voltage	AC 220V-240V
Input Current	2.27A/50m
Typ-power	10W/m
Max.Power	11W
Bend Diameter	>80mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


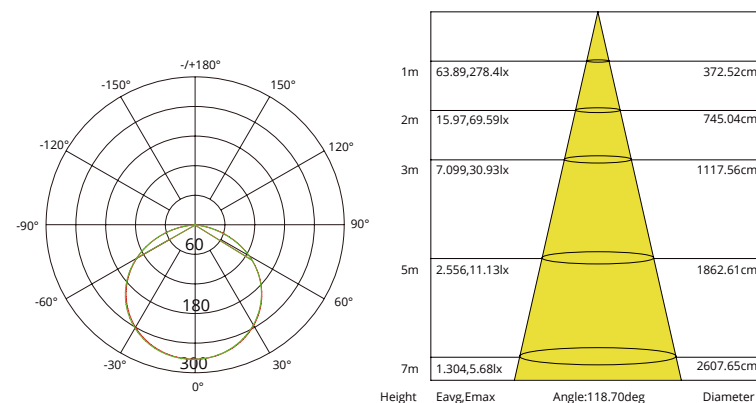


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	4000K	1050	105	F	
	5000K	1050	105	F	
	6500K	1000	100	F	

DIMENSIONAL DRAWING



SMD2835 120LEDS/M



Basic Parameters	
Size	13.5×6mm
Cutting Unit	12LEDs/100mm
Input Voltage	AC 220V-240V
Input Current	3.18A/50m
Typ-power	14W/m
Max.Power	15.4W
Bend Diameter	>80mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


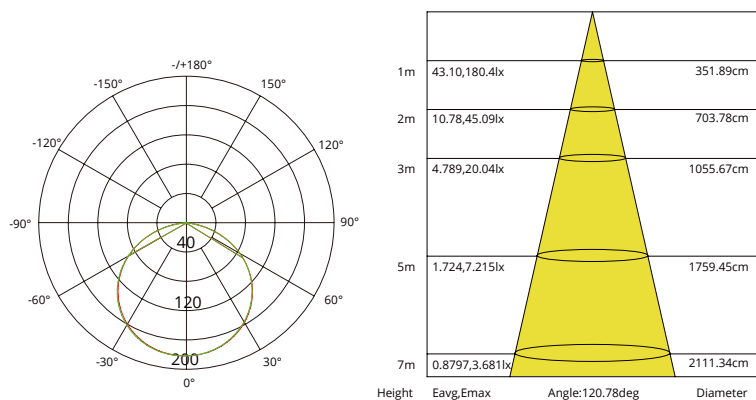


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	4000K	1470	105	F	■
	5000K	1470	105	F	■
	6500K	1400	100	F	■

DIMENSIONAL DRAWING



SMD2835 56LEDS/M



Basic Parameters	
Size	16.5×6.8mm
Cutting Unit	14LEDs/250mm
Input Voltage	AC 100V-120V
Input Current	2.71A/50m
Typ-power	6.5W/m
Max.Power	7.15W
Bend Diameter	>80mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


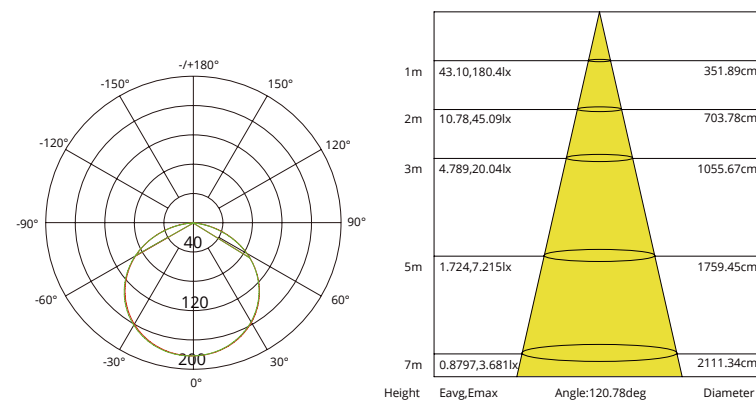


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	4000K	683	105	F	■
	5000K	683	105	F	■
	6500K	650	100	F	■

DIMENSIONAL DRAWING



SMD2835 70LEDs/M



Basic Parameters	
Size	16.5×6.8mm
Cutting Unit	7LEDs/100mm
Input Voltage	AC 100V-120V
Input Current	4.17A/50m
Typ-power	10W/m
Max.Power	11W
Bend Diameter	>80mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP


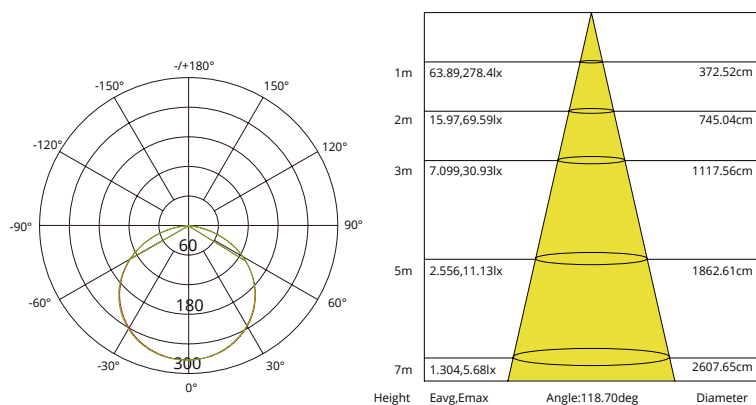


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	4000K	1050	105	F	■
	5000K	1050	105	F	■
	6500K	1000	100	F	■

DIMENSIONAL DRAWING



COB 288 CHIPS/M



Basic Parameters	
Size	50000×10.6×5.8mm
Cutting Unit	288LEDs/1000mm
Input Voltage	AC230V
Input Current	0.06A/m
Typ-power	12W/m
Max.Power	13.2W
Bend Diameter	>80mm
Copper foil	2oz

PHOTOMETRIC OF 1M STRIP

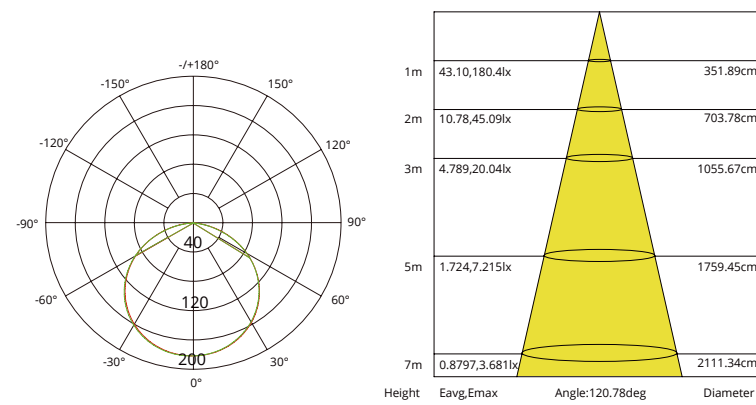


Photo-electric Parameters					
CRI	CCT	LM/m	LM/W	Energy Efficiency Class	
>80	2700K	756	63	G	■
	3000K	800	67	G	■
	4000K	840	70	G	■
	5000K	810	68	G	■
	6500K	780	65	G	■

DIMENSIONAL DRAWING

