


LD-FR-SJT-XXX-XXXX-120D-8*4MM (SOLID) ARC-SHAPED




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	3000K/4000K/7000K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP68

PHOTOMETRIC OF 1M STRIP

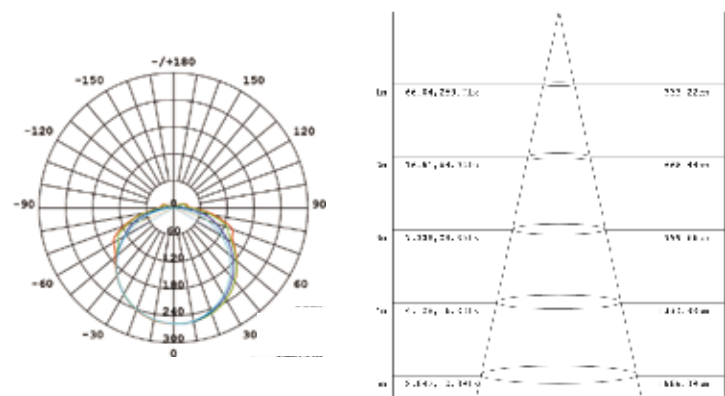

DIMENSIONAL DRAWING

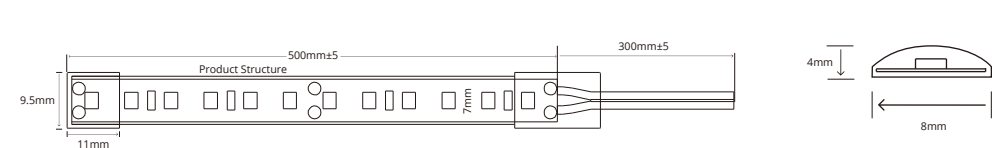


LD-FR-SJT-XXX-XXXX-120D-10*4MM (SOLID) ARC-SHAPED




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	3000K/4000K/7000K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP68

PHOTOMETRIC OF 1M STRIP

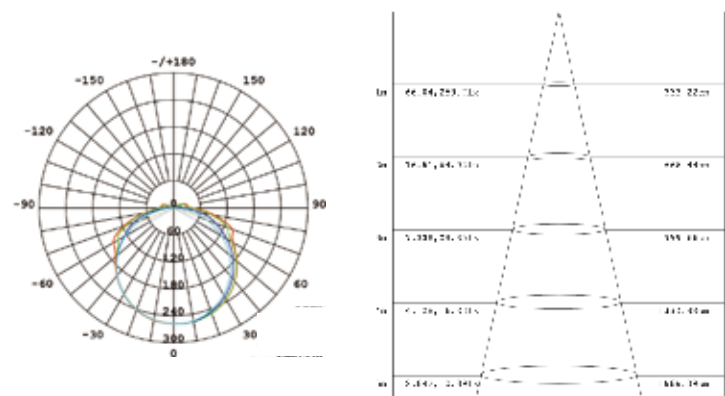

DIMENSIONAL DRAWING

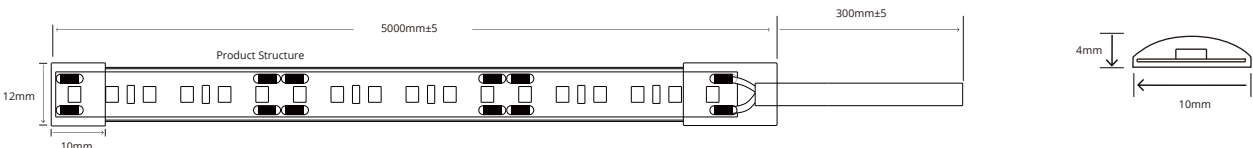


LD-FR-SJT-XXX-XXXX-120D-10*4MM (SOLID)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/w(4000K)
VOLTAGE	DC 12V /24V
CCT	3000K/4000K/7000K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP68

PHOTOMETRIC OF 1M STRIP

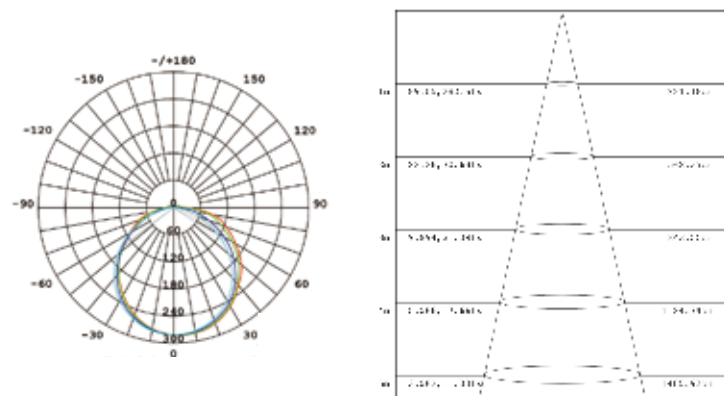

DIMENSIONAL DRAWING

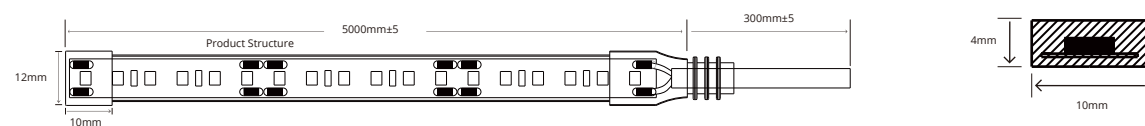


LD-FR-SJT-XXX-XXXX-120D-12*4.4MM (SOLID)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	3000K/4000K/7000K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP68

PHOTOMETRIC OF 1M STRIP

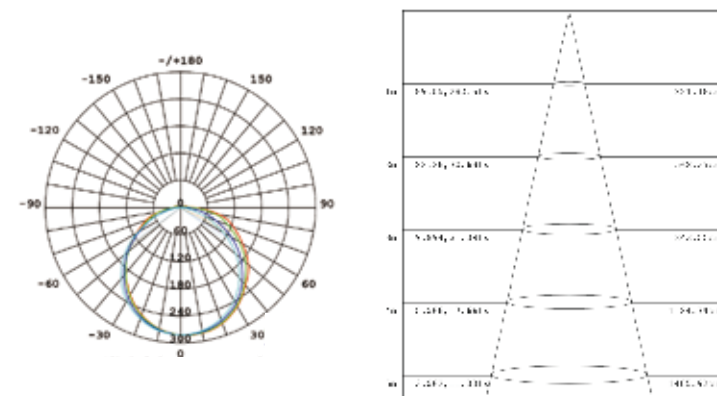

DIMENSIONAL DRAWING

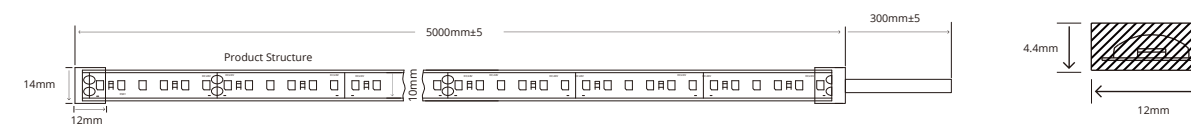


LD-FR-SJT-XXX-XXXX-120D-10*4.4MM (HOLLOW)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	3000K/4000K/6500
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

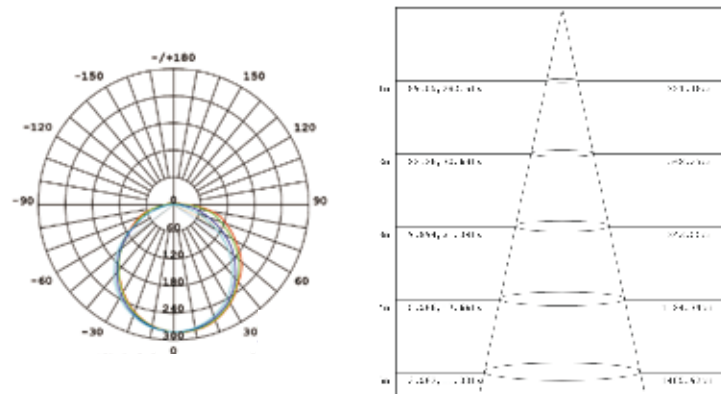

DIMENSIONAL DRAWING

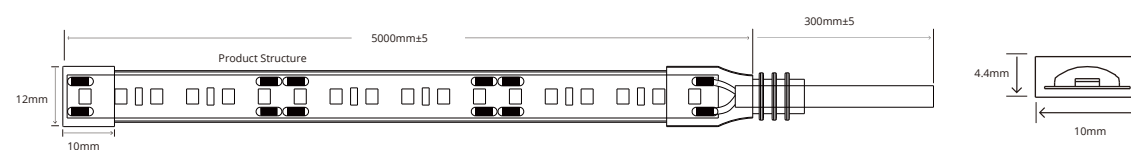


LD-FR-SJT-XXX-XXXX-120D-12*4.8MM (HOLLOW)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

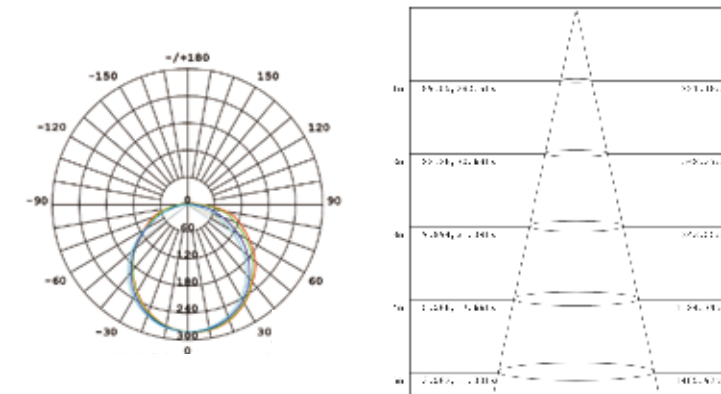

DIMENSIONAL DRAWING

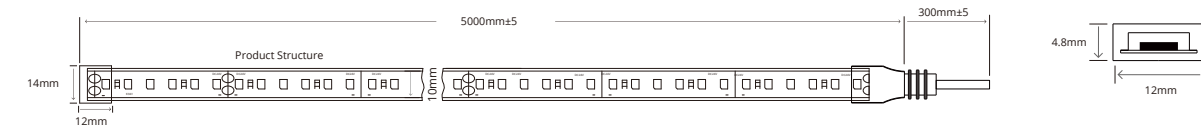


LD-FR-SJT-XXX-XXXX-120D-12*4.8MM (HOLLOW)



Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

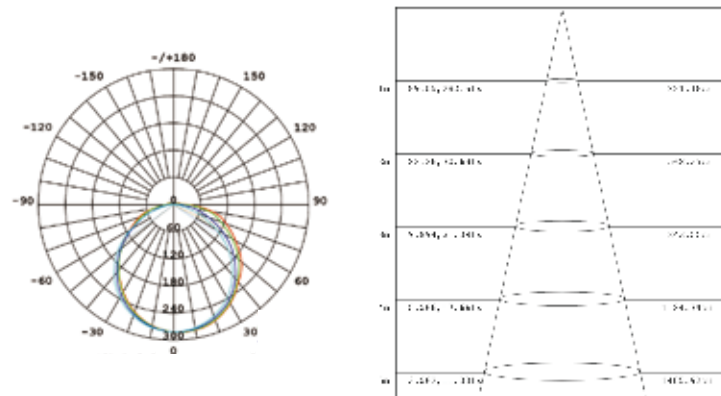

DIMENSIONAL DRAWING




LD-FR-SJT-AC230V-XXXX-120D-12*4.8MM (HOLLOW)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	AC 230V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	100MM
POWER/M	15.5W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

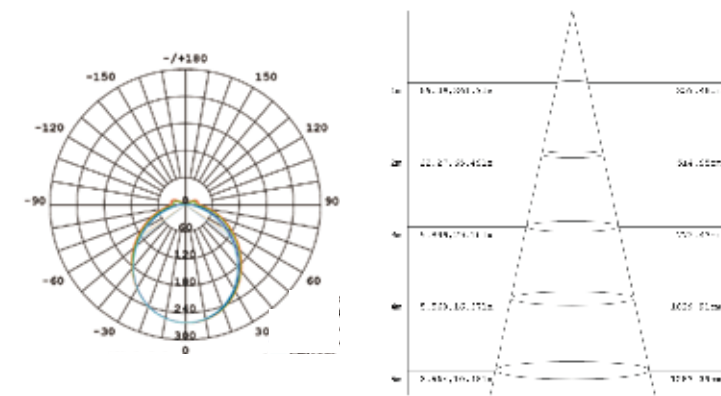

DIMENSIONAL DRAWING

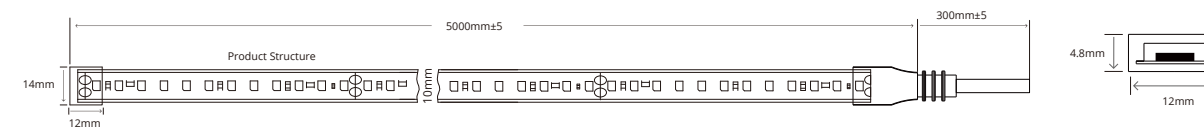


LD-FR-SJT-AC230V-XXXX-110D-12*4.8MM (HOLLOW)




Basic Parameters	
LED TYPE	2835
LEDs/M	110
CRI	>80
LM/W	92LM/w(4000K)
VOLTAGE	AC 230V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	100MM
POWER/M	12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

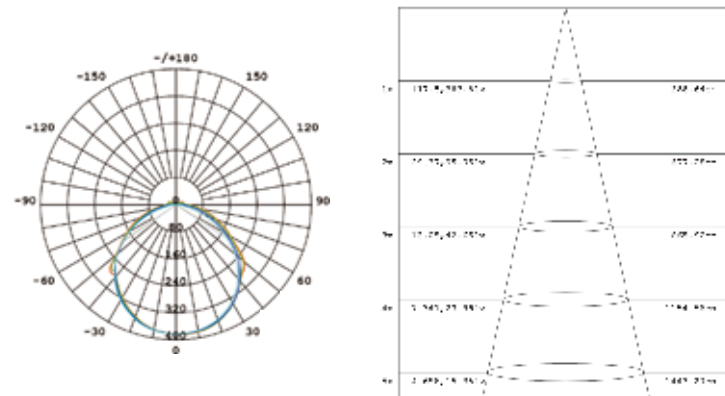

DIMENSIONAL DRAWING

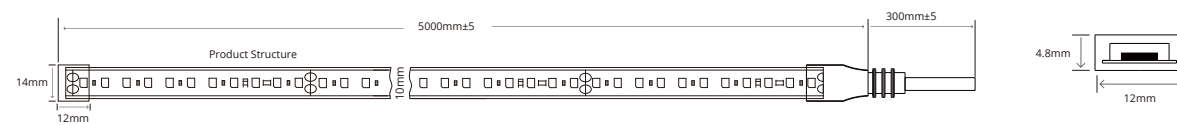


LD-FR-SJT-XXX-RGB-60D-12*4.8MM (HOLLOW)




Basic Parameters	
LED TYPE	5050RGB
LEDs/M	60
CRI	/
LM/W	/
VOLTAGE	DC 12V /24V
CCT	RGB
CUTTING	5cm/10cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

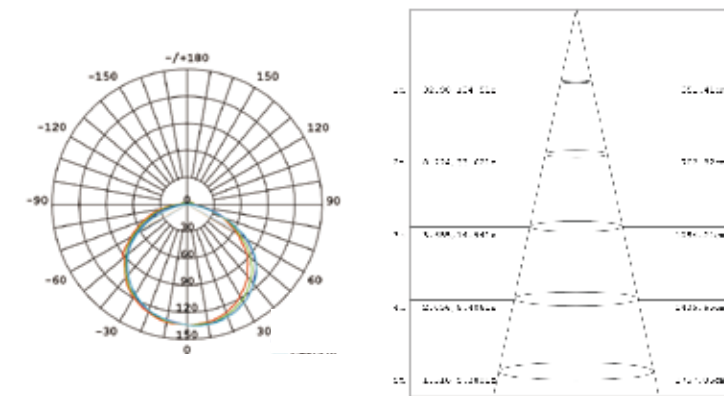

DIMENSIONAL DRAWING

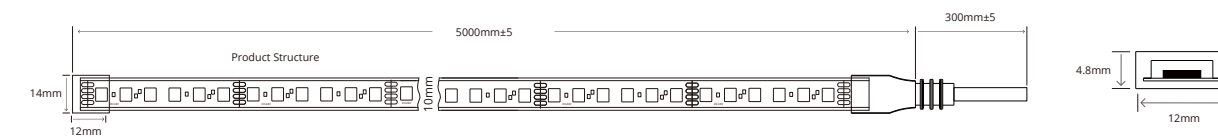


LD-FR-SJT-XXX-RGB-60D-12*4.8MM (HOLLOW)




Basic Parameters	
LED TYPE	2835RGB
LEDs/M	60
CRI	/
LM/W	/
VOLTAGE	DC 12V /24V
CCT	RGB
CUTTING	5cm/10cm
POWER/M	8W/12W
IP RATE	IP67


PHOTOMETRIC OF 1M STRIP

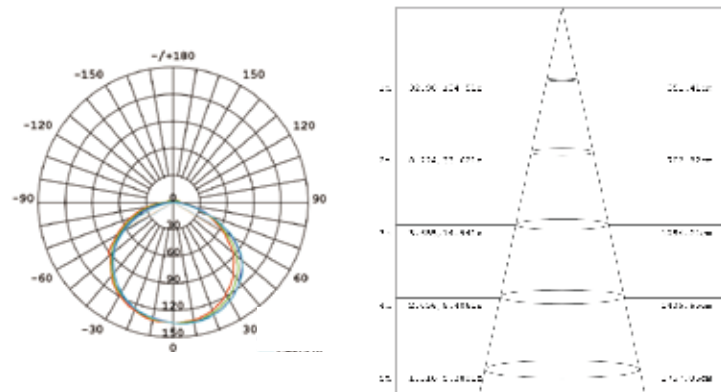

DIMENSIONAL DRAWING

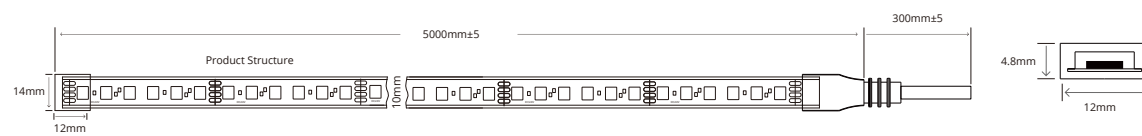


LD-FR-SJT-XXX-XXXX-120D-10*3.8MM (HOLLOW)

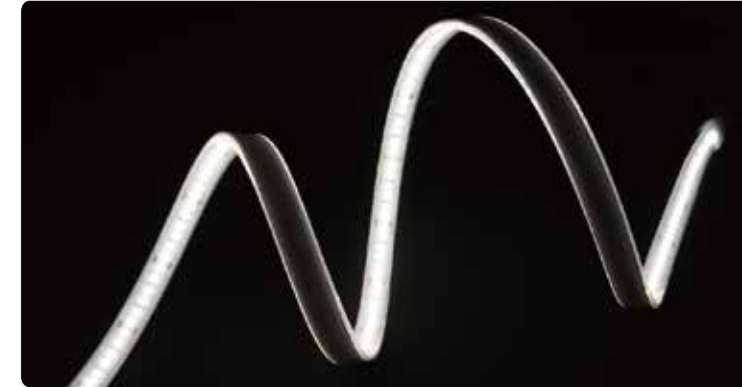


Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/w(4000K)
VOLTAGE	DC 12V /24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

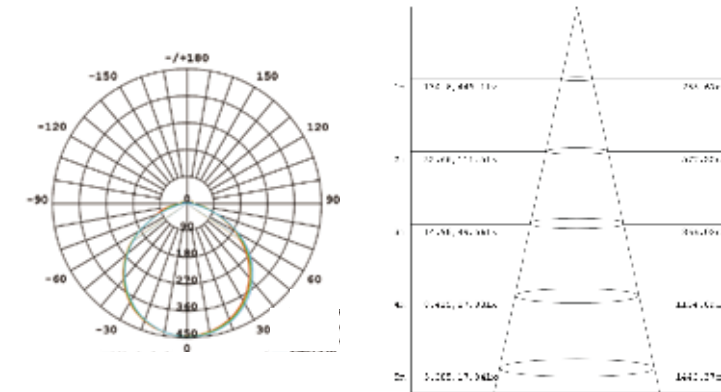

DIMENSIONAL DRAWING

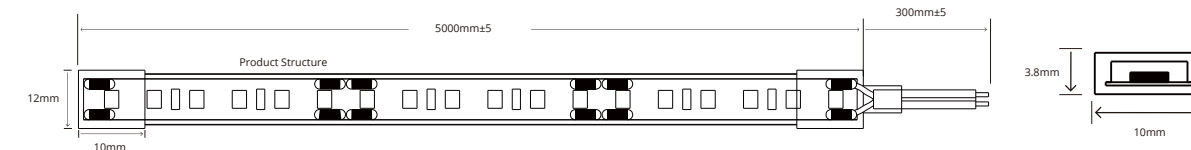


LD-FR-SJT-XXX-XXXX-120D-11.8*4MM (HOLLOW)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

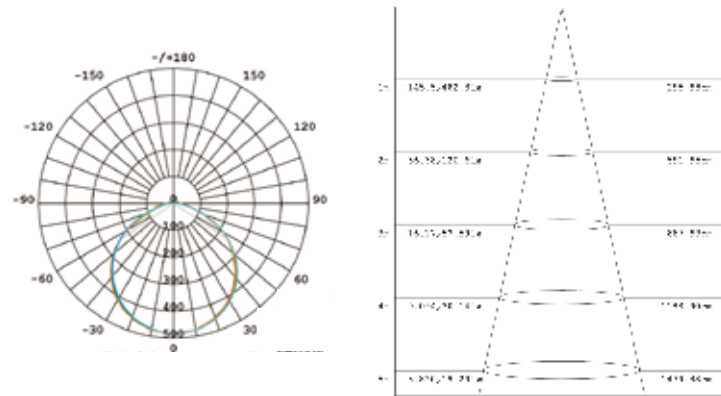

DIMENSIONAL DRAWING

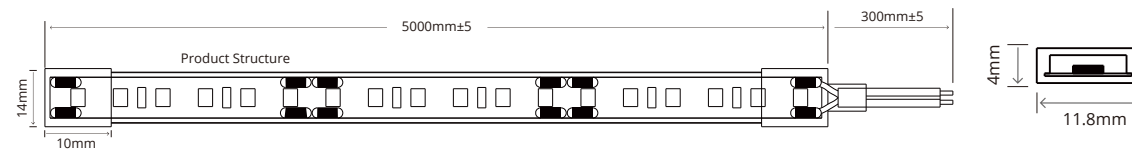


LD-FR-SJT-XXX-XXXX-120D-13.8*4MM (HOLLOW)




Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

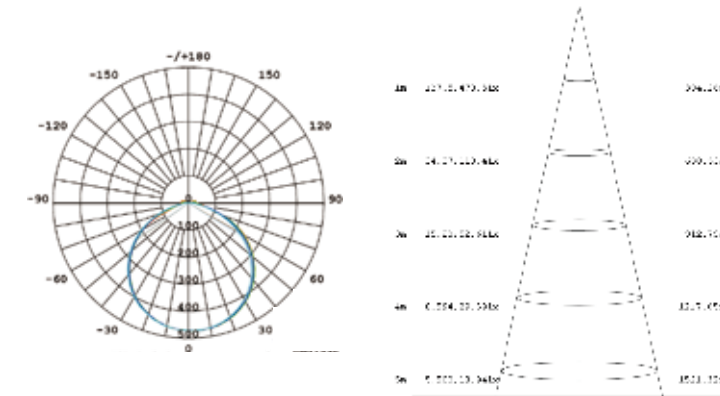

DIMENSIONAL DRAWING

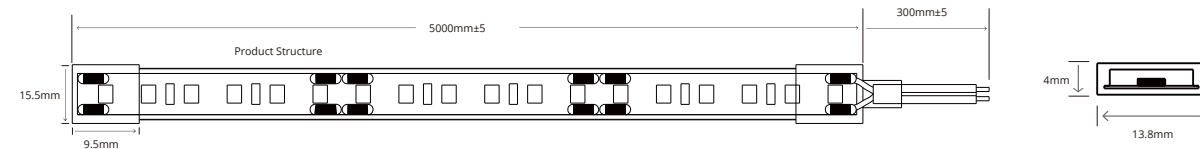


LD-FR-SJT-XXX-XXXX-RGB-60D-10*4.2MM (HOLLOW)




Basic Parameters	
LED TYPE	5050RGB
LEDs/M	60
CRI	/
LM/W	/
VOLTAGE	DC 12V /24V
CCT	RGB
CUTTING	5cm/10cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

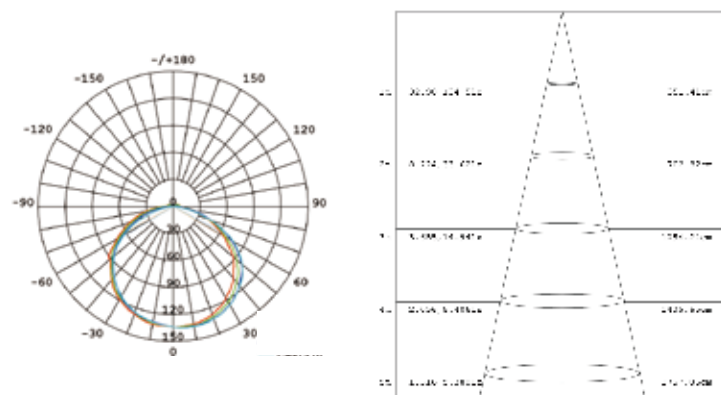

DIMENSIONAL DRAWING

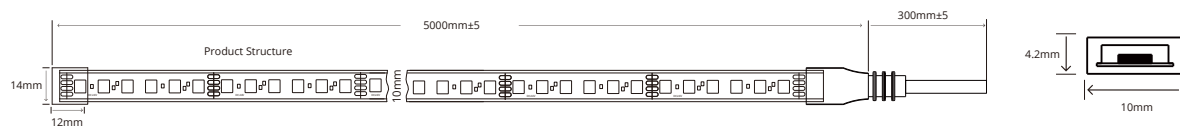


LD-FR-SJS-XXX-XXX-120D-12*4.8-IP67
Silicone And Fluorescent- Two In One Strip



Basic Parameters	
LED TYPE	2835
LEDs/M	120
CRI	>80
LM/W	100LM/W(4000K)
VOLTAGE	DC 12V /24V
CCT	2700K/3000K/4000K/5000K/6500K
CUTTING	2.5cm/5cm
POWER/M	8W/12W
IP RATE	IP67

PHOTOMETRIC OF 1M STRIP

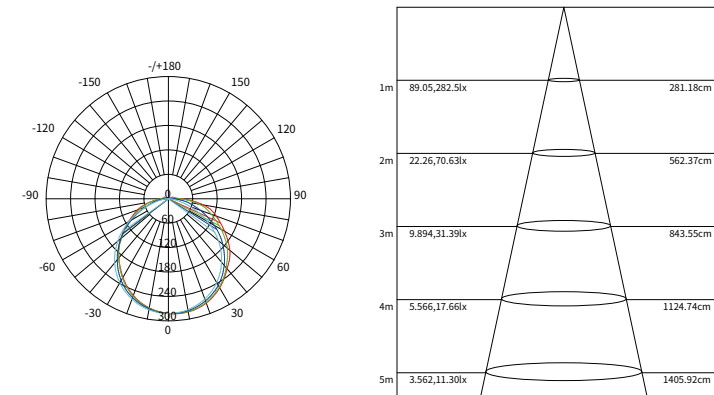

DIMENSIONAL DRAWING

